

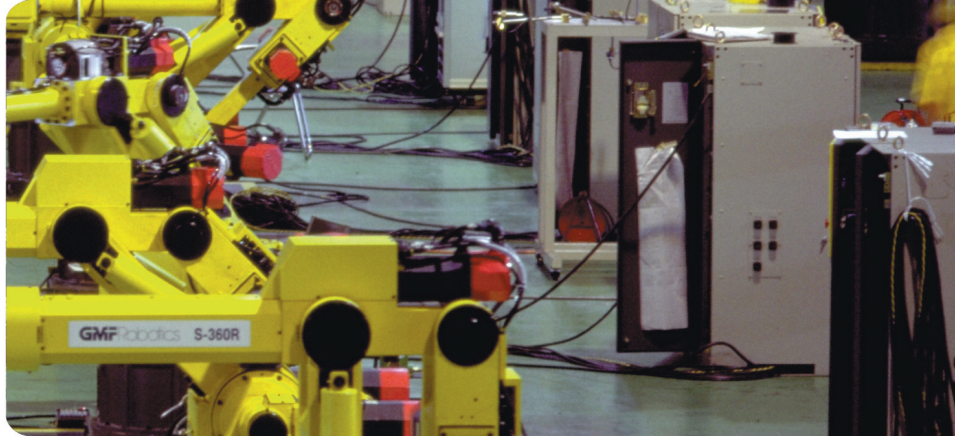


通用橡套软电缆
General Rubber Jacketed Flexible Cable

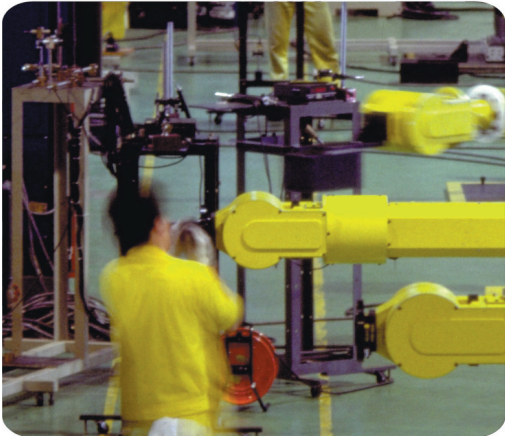

 **安徽天康（集团）股份有限公司**
Anhui Tiankang(Group)Shares Co.,Ltd
地址：安徽省天长市仁和南路20号
ADD : No.20south Renhe road,Tianchang,Anhui
邮编（ZIP）：239300
电话（TEL）：0550-7092499
传真（FAX）：0550-7095499
网址：<http://www.ahtkgroup.com>
E-Mail：tiankangzch@126.com



通用橡套软电缆

Soft Rubber Sheath Cable for General Purpose

本产品适用于交流额定电压450/750V及以下的家用电器、电动工具和各种移动电气设备。

It is used for household electrical appliance, electrical tools and various mobile electrical equipments of AC rated voltage 450/750V or lower.

一、生产执行标准 JB8735.2-1998。

Executive standard: JB8735.2-1998

二、使用特性

Working Condition

- 1、额定电压:YZ型为300/500V, YC型为450/750V。
- 2、电缆允许工作温度应不超过65℃。

1: Rated voltage 300/500V for YZ type and 450/750V for YC type

2: Working temperature allowed by cable is no higher than 65℃.

三、型号及名称及主要用途如表1

Type, Description and Main Application in Table 1

Table 1

型号 Type	名称 Description	主要用途 Main application
YZ、YZW	中型橡套软电缆 General type rubber sheath soft cable	用于各种移动电器设备和工具 For various mobile electric devices and tools
YC、YCW	重型橡套软电缆 Heavy type rubber sheath soft cable	用于各种移动电器设备, 能承受较大的机械外力作用 For various mobile electric devices and tools. It could bear strong mechanical force from outside
YH	天然胶电焊机电缆 Crude rubber electric welding machine cable	主要用作电焊机焊接线用 It is used as jointing line of electric welding machine
YHF	氯丁胶电焊机电缆 neoprene electric welding machine cable	

四、规格范围如表2

Specification Range in Table 2

Table 2

型号 Type	额定电压V Rated voltage	芯数 Core number	标称截面mm ² Nominal cross section area
YZ、YZW	300/500	2, 3, 4, 5	0.75~6
YC、YCW	450/750	1	1.5~240
		2	1~95
		3, 4	1~150
YH、YHF	--	5	1.5~25
		1	16~95

五、规格尺寸及技术参数如下表

Specification, Size and Technical Parameter in Table 3

Table 3 YZ、YZW 300/500V

标称截面mm ² Nominal cross section area	导体结构 Conductor structure	20℃导体电阻≤Ω/km Conductor resistance at 20℃	电缆外径参考 Cable OD for reference					
	根/单线直径 Pieces/diameter of single piece		2芯 cores	3芯 cores	4芯 cores	5芯 cores	6芯 cores	

0.75	24/0.20	26.0	8.2	8.8	9.6	11.0	-
1.0	32/0.20	19.5	8.8	9.2	10.0	11.5	-
1.5	30/0.25	13.3	10.5	11.0	12.5	13.5	12.0
2.5	49/0.25	7.98	12.5	13.0	14.0	15.5	14.0
4	81/0.25	4.95	14.0	14.5	16.5	18.0	16.0
6	122/0.25	3.30	17.0	18.0	20.0	22.5	19.5

Table 4 YC、YCW 450/750V

标称截面 mm ² Nominal cross section area	导体结构Conductor structure 根/单线 直径mm Pieces/ diameter of single piece	20℃导体电 阻≤Ω/km Conductor resistance at 20℃	电缆外径参考值 (mm) Cable OD for reference					
			1芯 core	2芯 cores	3芯 cores	4芯 cores	5芯 cores	3+1芯 core
1.5	30/0.25	13.3	7.2	11.5	12.5	15.5	15.0	-
2.5	49/0.25	7.98	8.0	13.5	14.5	16.5	17.0	15.5
4	81/0.25	4.95	9.0	15.0	16.0	18.0	19.5	17.5
6	122/0.25	3.30	11.0	18.5	20.0	22.0	24.5	21.0
10	77/0.41	1.91	13.0	24.0	25.5	28.0	31.0	26.5
16	119/0.41	1.21	14.5	27.5	29.5	32.0	35.5	30.5
25	189/0.41	0.780	16.5	31.5	34.0	37.5	41.5	35.5
35	265/0.41	0.554	18.5	35.5	38.0	42.0	-	38.5
50	379/0.41	0.368	21.0	41.0	43.5	48.5	-	46.0
70	530/0.41	0.272	24.0	46.0	49.5	55.0	-	51.0
95	437/0.52	0.206	26.0	50.5	54.0	60.5	-	55.0
120	551/0.52	0.161	28.5	-	59.0	65.5	-	59.0
150	696/0.52	0.129	32.0	-	66.5	74.0	-	66.0
185	851/0.52	0.106	34.5	-	-	-	-	-
240	1073/0.52	0.0801	38.0	-	-	-	-	-

Table 5 YH、YHF

标称截面mm ² Nominal cross section area	导体结构Conductor structure 根/单线直径Pieces/ diameter of single piece	20℃导体电阻≤Ω/km Conductor resistance at 20℃		电缆外径参考 mm Cable OD for reference
		不镀锡 non tinned	镀锡 tinned	
16	509/0.20	1.16	1.19	11.5
25	796/0.20	0.758	0.780	13.0
35	1115/0.20	0.536	0.552	14.5
50	1592/0.20	0.379	0.390	17.0
70	2229/0.20	0.268	0.276	19.5
95	3025/0.20	0.198	0.204	22.0

六、交货要求

- 1、根据双方协议允许任何长度的电缆交货，长度误差为±0.5%。
- 2、用户对产品有阻燃特性要求,在合同中需另补充协议。

Delivery Length

- 1: Delivery length of cable depends on both agreements with length error allowance of ±0.5%
- 2: The additional agreement should be added according to customer's requirements on flame retardant performance.